


<b>CONSTRUCTION</b>	Brass Body (CuZn40Pb2), EN CW617N (Equivalent to BS CZ122) Zinc-Alloy Handles
<b>FINISHES</b>	Chrome Plated to BS EN 248
<b>PRODUCT TYPE</b>	Contemporary
<b>WATER PRESSURE</b>	Min. 0.5 Bar, Max. 6.0 Bar
<b>PLUMBING SYSTEMS</b>	Suitable for All Plumbing Systems, Hot and Cold Water Pressure Preferably Balanced Max. Supply Pressure Differential Requirement No Greater Than 5:1
<b>CERTIFICATION</b>	WRAS approved and certified
<b>STANDARDS</b>	Complies with BS5412, BS EN200
<b>NET WEIGHT</b>	10 Kg
<b>CARTRIDGE</b>	1/4 Turn 3/4" Ceramic Disc Valves
<b>AERATOR</b>	Laminar Spout
<b>FITTING</b>	Brass G3/4" BSP Tails



### Flow Rates (Litres per minute)

SYSTEM PRESSURE	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	5.5	8.8	-	13.2	20.5	-	24.1	29.4	-	-

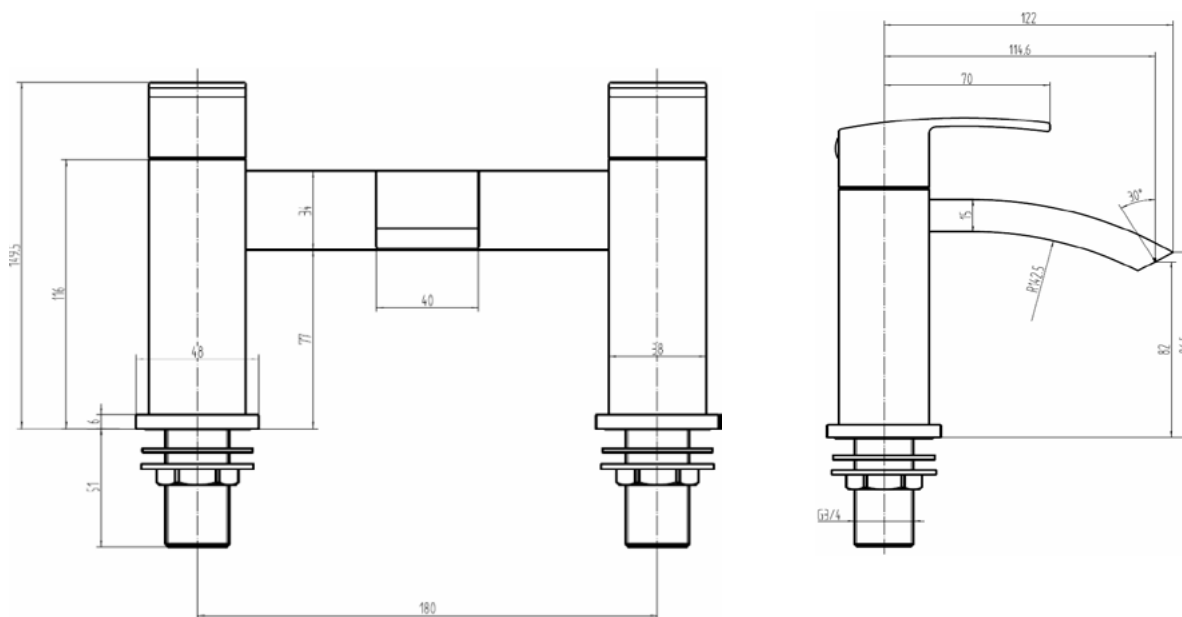

The information contained on this page was correct at date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice.