


AM1112 Basicmodul Slim

Wall concealed WC cistern

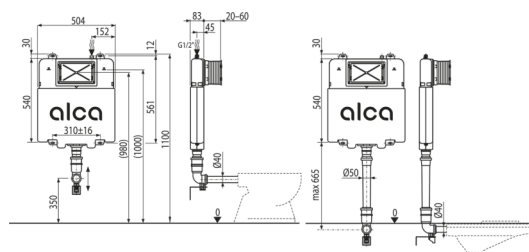

Application

For installing the stand-alone WC or a WC that is firmly embedded in the floor
For walling in and around – installation depth only 84 mm

Features

- Dual flush independently adjustable with hygienic reserve
- Compatible with all flush plates Alca except sensor flush plates and NIGHT LIGHT
- The construction of polystyrene insulation prevents condensation forming on the surface of the tank and dampens the vibrations from the tank into the building structure
- The service opening cover simplifies assembly and prevents the penetration of moisture and impurities
- Material: polypropylene
- Installation depth adjustable from 20–60 mm
- Mounting height 1070 mm
- The cistern is made of one piece, thus ensuring 100% impermeability
- Water supply from the rear/top
- Angle valve with the ability to connect to the Mepla piping system
- Maintenance work without using any tools
- Installation depth 84 mm

Scope of supply

- Fixation set: combi screw $\varnothing 8 \times 120$ – 4 pcs, dowel $\varnothing 12$ – 4 pcs, screws 5×40 , dowel $\varnothing 8$
- The 2 piece cover of the service opening is simply adjustable
- Cistern with fill and flush valve
- Connection set $\varnothing 40$ for connection to the toilet bowl from the water supply tank
- Fittings 1/2" water connection with the integrated angle valve Schell 1/2–3/8"

Order number, Logistic information

Code	EAN	Weight (piece packing palett)	Dimensions (piece packing)	Quantity (packing palett)
AM1112	8595580550981	5,17 5,17 123,4 kg	965x515x110 965x110x515 mm	1 20 pcs

Warranty	Customs code	Norms
2/15 years *	39229000	EN 14124, EN 14055

Technical specifications

- Recommended range of water pressure 0,3-0,5 MPa
- Functional range of water pressure 0,05-1,6 MPa
- Hygienic reserve 3 l
- Water volume in the cistern 9 l
- Water connection from the back or top via mounting holes G1/2 "
- Factory setting of small flush 3 l
- Factory setting of large flush 6 l